

RF-S (Variable RF Sampler – 200 Watts)

The model **RF-S** (Variable RF Sampler) is designed specifically to sample and convert very low RF power envelopes directly to a usable signal suitable for feeding the vertical "Y" input of your oscilloscope. This may be used to establish a post-amplifier reference signal when used with the model **RF-D**.

Additionally, the **RF-S** may be used as an RF coupling probe for spectrum analysis, RF envelope observation or frequency counting and control. It features a very low operational VSWR over a broad frequency range. Insertion loss is a negligible 0.1 dB. The **RF-S** produces an un-rectified, variable non-directional sample at the BNC jack.



6 Ft. cable and adapter included!


RF-S Specifications

- Frequency Response: 500 kHz ~ 60 MHz
- Rated Input: 0w ~ 200w PEP
- Sampler Output: -26dB ~ -50dB
- Connectors In: SO-239
- Connectors Out: SO-239 and BNC
- Controls: Variable RF Output
- VSWR: < 1:1.1
- Insertion Loss: < 0.1 dB
- Cable and Adapter: 6 Ft. BNC Male-to-BNC Male and UHF Male-to-Male Adapter
- Applications:
 - Oscilloscope Vertical "Y" In (Post-Amplifier Reference Signal)
 - RF Modulation Envelope Monitor
 - Peak Envelope Power Monitor
- Dimensions: W 2 1/8" x L 3 1/4" x H 1 5/8"



Scope / RF Demodulator / RF Sampler Wiring Chain

© CleanRF Systems

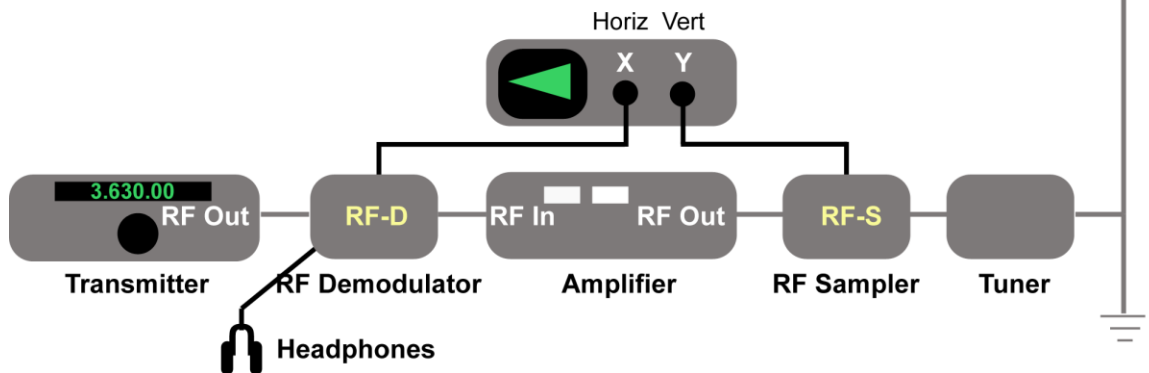

Trapezoidal Linear RF Pattern Provided by CleanRF Systems Splatter View.

Note sides of Trapezoid are straight with distinct angles.

Bandwidth determined by exciter's audio, not distortions from RF amplifier.

- Low I.M.D. -

