



CleanRF Systems

1020 Wabash Street
3-201
Fort Collins, CO 80526-3198
Phone: 970-412-3456
e-mail: Tyler@CleanRF.com

Splatter View 5K (RF Demodulator & RF-S5K) (5,000 Watts)

RF-D and RF-S5K station monitor package for complete X/Y pre/post linear amplification signal monitoring.



RF-D Specifications

- Frequency Response: 500 kHz ~ 60 MHz – Audio: 10 Hz ~ 16 kHz
- Rated Input: 1.5w ~ 200w PEP
- AM Dynamic Range: 60dBu
- Connectors In: SO-239
- Connectors Out: SO-239, BNC and ¼" TRS Audio Out
- Controls: Variable AF Output
- VSWR: < 1:1.1
- Insertion Loss: < 0.1 dB
- Cable and Adapter: 6 Ft. BNC Male-to-BNC Male and UHF Male-to-Male Adapter
- Applications:
 - Oscilloscope Horizontal "X" In (Pre-Amplifier Reference Signal)
 - AM Audio Modulation Monitor
 - RF Envelope Source Trigger Synchronization
- Dimensions: W 2 1/8" x L 3 ¼" x H 1 5/8"


RF-S5K Specifications (5,000 Watts)

- Frequency Response: 500 kHz ~ 60 MHz
- Rated Input: 0w ~ 5,000w PEP
- Sampler Output: -26dB ~ -50dB
- Connectors In: SO-239
- Connectors Out: SO-239 and BNC
- Controls: Variable RF Output
- VSWR: < 1:1.1
- Insertion Loss: < 0.1 dB
- Cable and Adapter: 6 Ft. BNC Male-to-BNC Male and UHF Male-to-Male Adapter
- Applications:
 - Oscilloscope Vertical "Y" In (Post-Amplifier Reference Signal)
 - RF Modulation Envelope Monitor
 - Peak Envelope Power Monitor
- Dimensions: W 2 1/8" x L 3 ¼" x H 1 5/8"



Scope / RF Demodulator / RF Sampler Wiring Chain

© CleanRF Systems

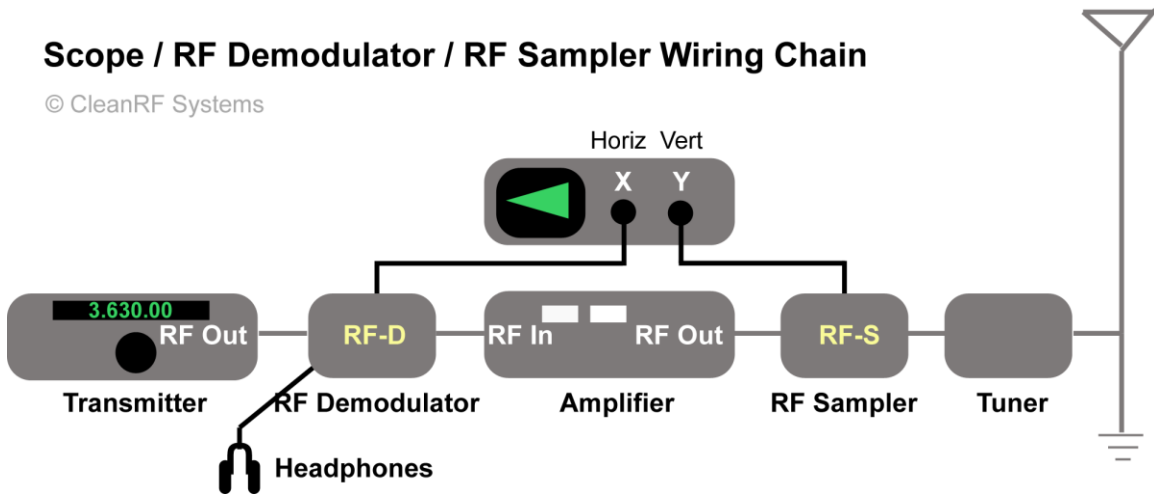


Trapezoidal Linear RF Pattern Provided by CleanRF Systems Splatter View.


Note sides of Trapezoid are straight with distinct angles.

Bandwidth determined by exciter's audio, not distortions from RF amplifier.

- Low I.M.D. -

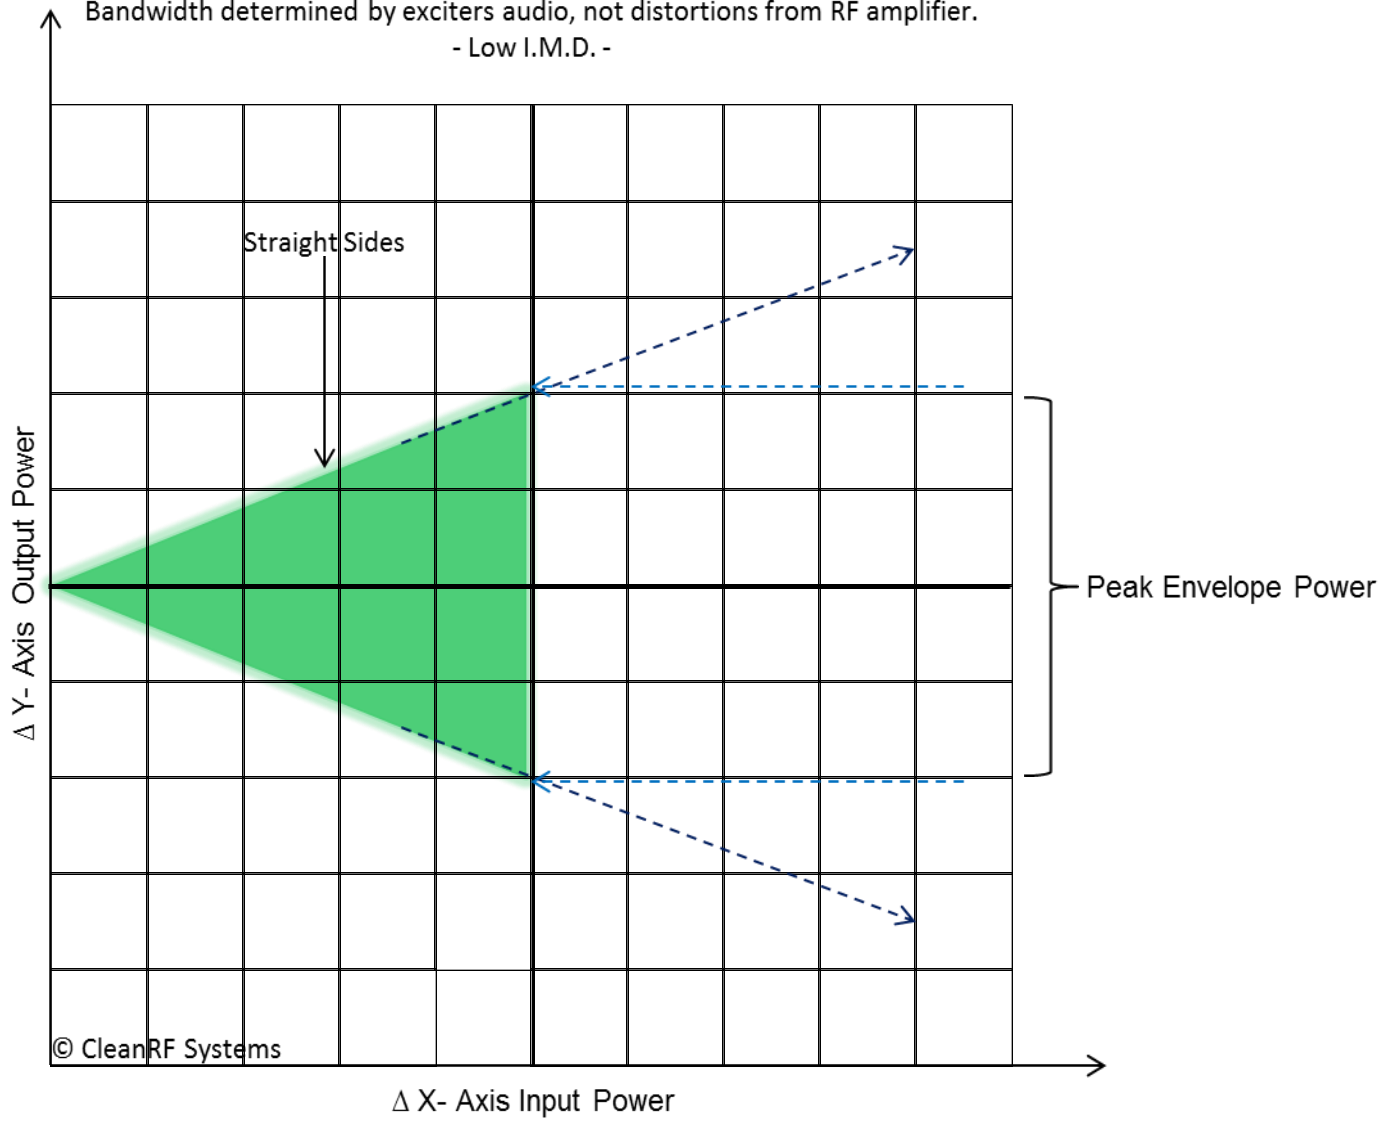


Amplitude Modulation Dynamic Range at 1 kHz

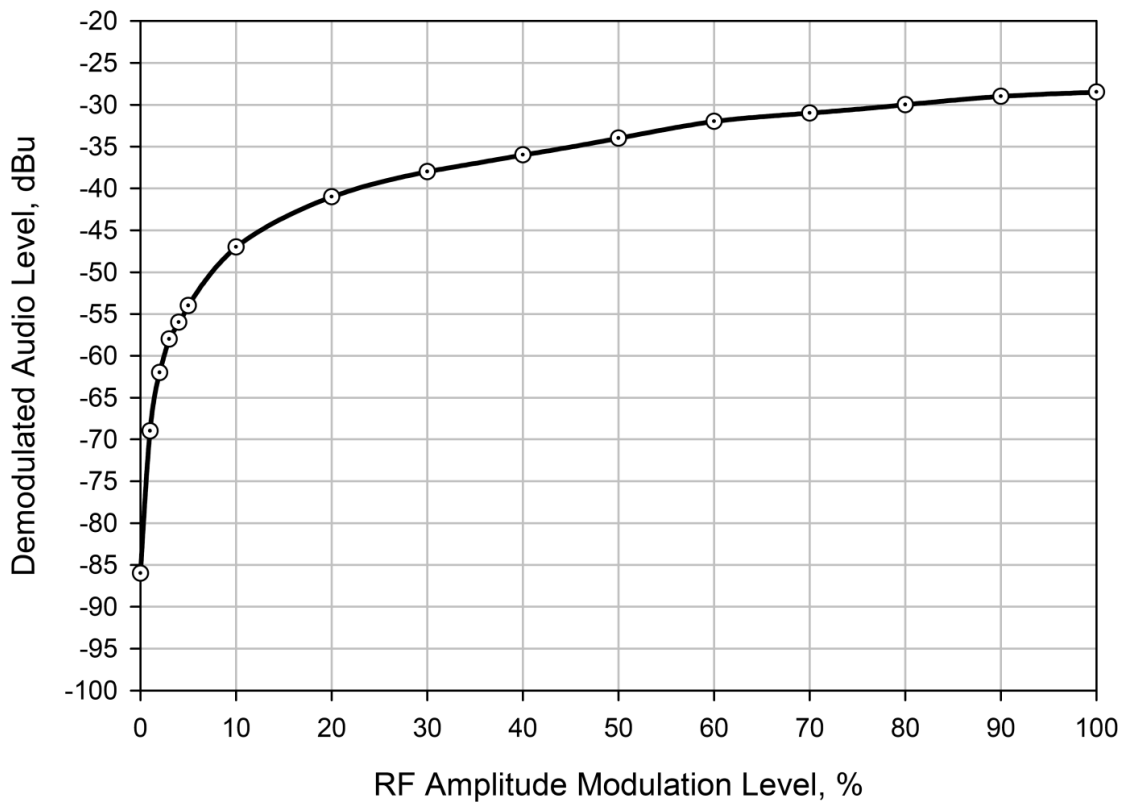

Sampling: 96000 Hz
 FFT size: 65536
 Averaging: 1
 Window: Hanning

CleanRF.com RF Demodulator
 RF at +7.1dBm, AM sweep 80% depth

Printed by: SpectraPLUS Professional Edition
 Licensed to: John Stuart
 Sun Jan 08 15:19:08 2012

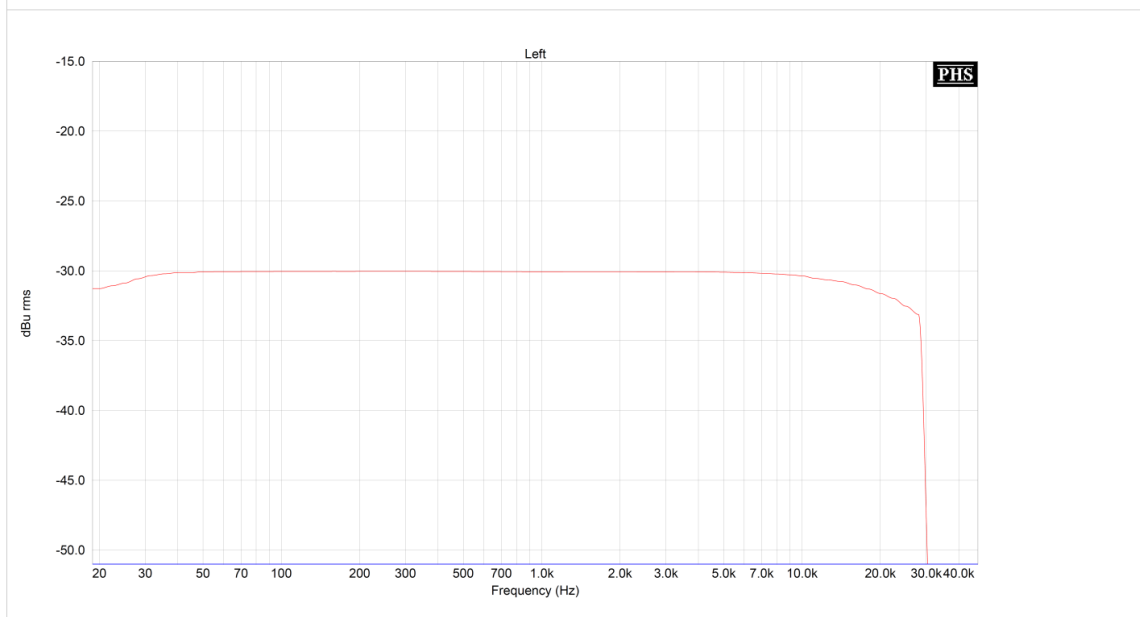

RF signal generated by HP2920A Comm Test Set = 7 MHz at +7.1 dBm carrier and 80% AM level.
 RF Demodulator BNC output to M-Audio Delta 1010LT soundcard calibrated with Fluke 289 True RMS Meter at 1kHz.