

## RF-S5K (Variable RF Sampler – 5,000 Watts)

The model **RF-S5K** (Variable RF Sampler) is designed to directly sample and convert the RF envelope from a high power amplifier to a usable signal suitable for feeding the Vertical "Y" input of your oscilloscope. This may be used to establish a post-amplifier reference signal when used with the model **RF-D**.

Additionally, the **RF-S5K** may be used as an RF coupling probe for spectrum analysis, RF envelope observation or frequency counting and control. It features a very low operational VSWR over a broad frequency range. Insertion loss is a negligible 0.1 dB. The **RF-S5K** produces an un-rectified, variable non-directional sample



at the BNC jack.

6 Ft. cable and adapter included!


### RF-S5K Specifications

- Frequency Response: 500 kHz ~ 60 MHz
- Rated Input: 0w ~ 5,000w PEP
- Sampler Output: -26dB ~ -50dB
- Connectors In: SO-239
- Connectors Out: SO-239 and BNC
- Controls: Variable RF Output
- VSWR: < 1:1.1
- Insertion Loss: < 0.1 dB
- Cable and Adapter: 6 Ft. BNC Male-to-BNC Male and UHF Male-to-Male Adapter
- Applications:
  - Oscilloscope Vertical "Y" In (Post-Amplifier Reference Signal)
  - RF Modulation Envelope Monitor
  - Peak Envelope Power Monitor
- Dimensions: W 2 1/8" x L 3 1/4" x H 1 5/8"



### Scope / RF Demodulator / RF Sampler Wiring Chain

© CleanRF Systems

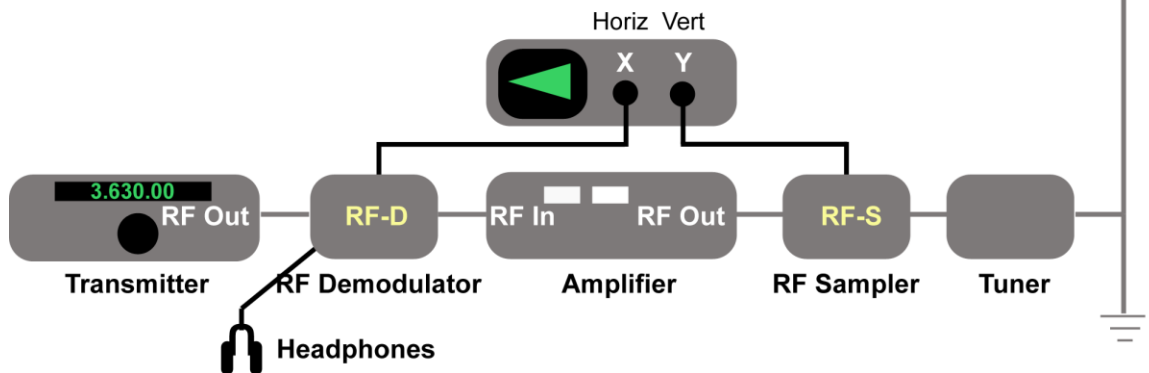

Trapezoidal Linear RF Pattern Provided by CleanRF Systems Splatter View.

Note sides of Trapezoid are straight with distinct angles.

Bandwidth determined by exciter's audio, not distortions from RF amplifier.

- Low I.M.D. -

